

14 April 2025

# **NEW MINERALISATION DISCOVERED AT DYNASTY**

## **Key Highlights**

- Diamond drilling has confirmed new shallow mineralisation with significant results including:
  - IGDD24-041:
    - 2.6m @ 3.5 g/t Au, 21.5 g/t Ag from 26.8m &
    - 3.7m @ 2.5 g/t Au, 9.9 g/t Ag from 92.9m
- Iguana resource drilling has confirmed down-dip resource extensions, with significant results including:
  - IGDD24-036:
    - 5.4m @ 2.3 g/t Au, 5.7 g/t Ag from 49.9m &
    - 2.3m @ 2.7 g/t Au, 5.9 g/t Ag from 212.1m
- 31 holes for 7,970m completed of the 10,000m Dynasty resource drilling program. Results returned for 25 holes and pending from 6 holes, with further assays expected to be delivered in the coming fortnight.
- Dynasty 3D geological model updated incorporating latest drill results in preparation for the planned resource update.
- Heavy rainfall was experienced in March, with drilling activities suspended until weather conditions are expected to improve in late April. Remaining resource drilling will be accelerated once activities recommence.

#### Titan's CEO Melanie Leighton commented:

"We are pleased to deliver further extensional results from Iguana resource drilling which has confirmed shallow extensional resources in new areas. In fact, results returned from IGDD24-041 were both wider and higher grade than that returned from trenches at surface, which bodes well for targeting additional shallow resources, just below the surface at Iguana."

"Despite a slowdown in drilling activities due to weather conditions, the geology team have used this time to clear the decks, review latest drill results, and in doing so have identified new targets that are set to be drill tested when drilling recommences in the coming two weeks."

"Titan has a strong balance sheet with a clear runway to accelerate resource and exploration drill programs at Dynasty, while JV & Earn-in Partner, Hancock Prospecting, undertake a 10,000m porphyry copper drilling program at the Linderos Project to earn a 25% interest in the project."

"We look forward to delivering exciting news on multiple fronts in the coming weeks ahead across our portfolio of large-scale gold and copper projects."





14 April 2025

# **Dynasty Resource Drilling Update**

Titan Minerals Limited (**Titan** or the **Company**) (**ASX:TTM**) is pleased to provide an update on the Company's 100% held Dynasty Gold Project (**Dynasty**), where it has been undertaking a 10,000m resource drilling program with an aim to substantially grow Dynasty's **3.1 Moz gold and 22 Moz silver Mineral Resource**.

Drilling has largely been directed toward the Cerro Verde and Iguana prospects with encouraging results returned to date. A total of 31 diamond holes have been completed for 7,970 metres, with results now returned for 25 holes and results pending for another 6 holes completed at Cerro Verde.

Latest results returned from the Iguana prospect include several significant results as described below.

#### IGDD24-041

Drillhole IGDD24-041 was drilled to test mineralisation to the south of Iguana East in an area never previously been drilled. The hole was successful in confirming three mineralised veins from very shallow depths, defining new mineralisation from surface down to ~100m vertical.

Previous resources in this area were limited, so the discovery of two additional near surface mineralised veins indicates the potential for shallow resource growth. Mineralisation intersected in IGDD24-041 remains open at depth and along strike, with further drilling planned to define mineralisation extensions and resources.

Significant intercepts include:

- 2.6m @ 3.5 g/t Au, 21.5 g/t Ag from 26.8m &
- 3.7m @ 2.5 g/t Au, 9.9 g/t Ag from 92.9m

#### IGDD24-036

Drillhole IGDD24-036 was designed to test down-dip resource extensions at Iguana. The hole was successful in confirming and extending mineralisation a further 50m below previous drilling, also validating historical drill intersections of 2.9m @ 4.0 g/t Au from 97.4m in DDH134 and 1.6m @ 1.8 g/t Au from 154.9m in IGD006. Drillhole IGDD24-036 will likely contribute to a resource upgrade in this area- confirming extensional down-dip growth, improved grade and improved confidence.

Significant intercepts include:

- 5.4m @ 2.3 g/t Au, 5.7 g/t Ag from 49.9m &
- 2.3m @ 2.7 g/t Au, 5.9 g/t Ag from 212.1m

#### IGDD24-040

Drillhole IGDD24-040 was designed to test down-dip resource extensions at Iguana. The hole was successful in confirming and extending mineralisation a further 50m below previous drilling.

1.4m @ 3.4 g/t Au, 42.9 g/t Ag from 211.3m, within a broader intersection of 4.7m @ 1.3 g/t Au, 15.6 g/t Ag

These latest Iguana results are in addition to previously announced shallow significant intercepts including:

- 15.5m @ 3.0 g/t Au, 22.8 g/t Ag from 89.1m in IGDD24-027
- 3.0m @ 4.9 g/t Au, 11.2 g/t Ag from 21.8m in IGDD24-031



14 April 2025

- 2.0m @ 2.5 g/t Au, 4.2 g/t Ag from 53.2m in IGDD24-030
- 2.8m @ 2.0 g/t Au, 2.6 g/t Ag from 206.0m in IGDD24-028

Drill results are pending for 6 holes completed at Cerro Verde. The Company anticipates further results to be released in the coming fortnight. The Company intends to accelerate resource drilling once field operations recommence and looks forward to providing further updates as exploration and resource drilling programs advance at the Dynasty Gold Project.

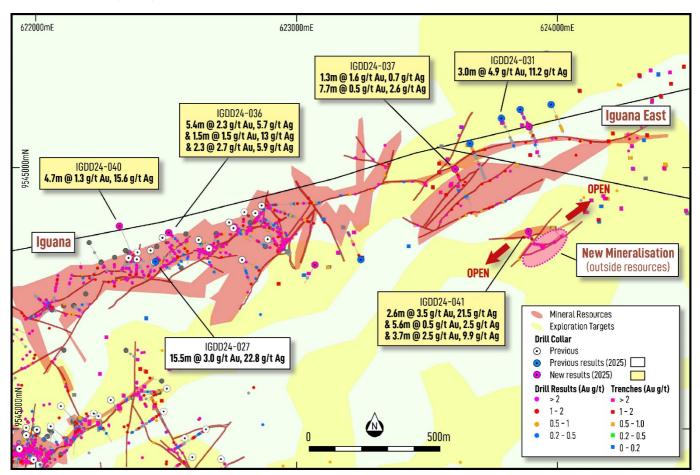


Figure 1. Iguana prospect displaying interpreted geology, modelled veins, resources, resource extensional targets, trenching and drilling completed and latest significant drill intercepts.





14 April 2025

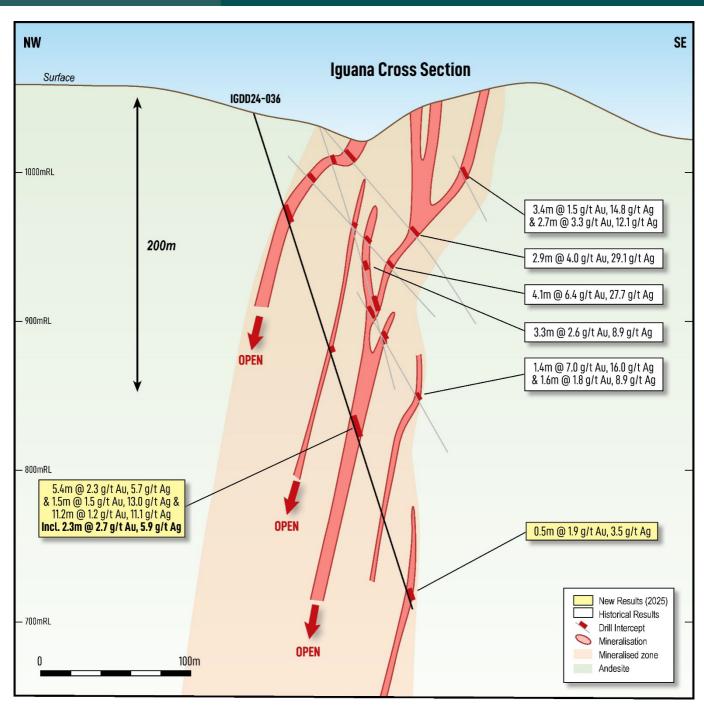


Figure 2. Iguana Cross Section looking northeast, showing geological interpretation, historical and new significant drill intersections. Note new drillhole IGDD24-036 assays returned, extending mineralisation down dip.



S +61 8 6555 2950 🖂 info@titanminerals.com.au



14 April 2025

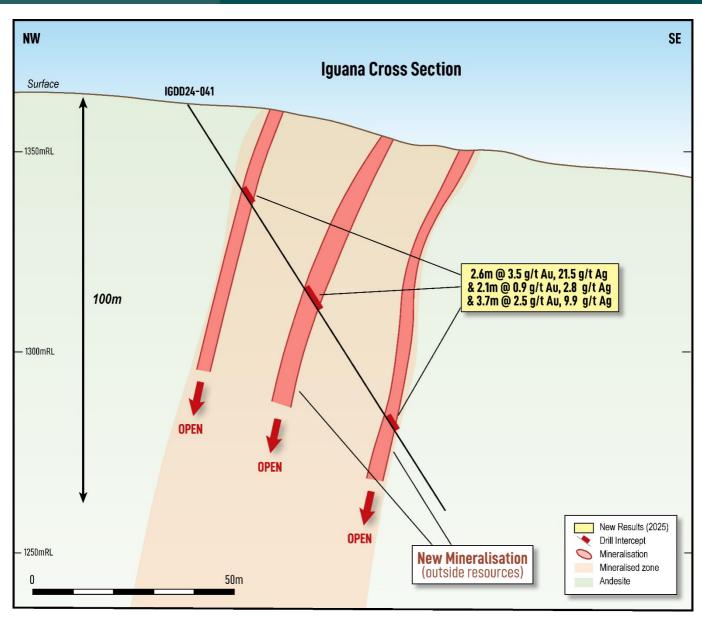


Figure 3. Iguana Cross Section looking northeast, showing geological interpretation, new significant drill intersections. Note new drillhole IGDD24-041 results, confirming and extending mineralisation from surface trenching and identifying two new mineralised veins from shallow depths outside current mineral resources.





14 April 2025

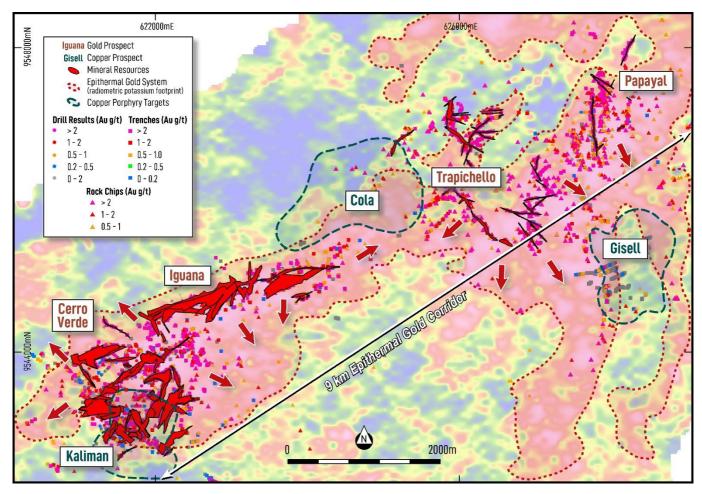


Figure 4. Dynasty Gold Project displaying Mineral Resources, epithermal gold system footprint as highlighted by radiometrics (potassium) and porphyry copper targets in relation to gold targets.

## **ENDS-**

Released with the authority of the Board.

## **Contact details:**

#### **Investor Relations: Australia**

**Melanie Leighton Chief Executive Officer** E: melanie@titanminerals.com.au Ph: +61 8 6555 2950

Jane Morgan **Investor & Media Relations** E: jm@janemorganmanagement.com.au **Ph:** + 61 405 555 618



S +61 8 6555 2950 🖂 info@titanminerals.com.au



14 April 2025

#### Follow us on:



www.linkedin.com/company/titan-minerals-ltd

www.twitter.com/MineralsTitan

www.titanminerals.com.au

For further information on the company and our projects, please visit www.titanminerals.com.au





14 April 2025

### About the Dynasty Gold Project

The Dynasty Gold Project is an advanced exploration- early resource stage project comprising five contiguous concessions and is 139km<sup>2</sup> in area. Three of these concessions received Environmental Authorisation in 2016 and are fully permitted for all exploration and small-scale mining activities.

Exploration work at the Dynasty Gold Project has outlined an extensive zone of epithermal mineralisation over a nine-kilometre strike extent. There is also considerable potential for porphyry copper mineralisation as identified by surface mapping, trenching and drilling at the Kaliman prospect and by surface geochemistry and mapping at the Cola and Gisell prospects.

#### Inferred Indicate Tota Dynasty Grade Contained Metal Grade Contained Metal Grade Contained Metal Project Tonnes Tonnes Tonnes (Moz) (M) (M) (Moz) (g/t) (Moz) (g/t) (M) (g/t) Ag Au Au Au Ag Au Au Ag Ag Ag Au Ag Cerro 15.17 28.80 2.01 13.51 0.98 6.59 13.63 2.15 12.44 0.94 5.45 2.08 13.00 1.92 12.04 Verde Iguana 2.41 2.36 16.08 0.18 1.25 8.52 1.92 13.00 0.53 3.56 10.93 2.02 13.68 0.71 4.81 Trapichillo 0.05 1.89 9.28 0.00 0.01 2.89 3.83 39.80 0.36 3.70 2.94 3.80 39.31 0.36 3.71 0.46 48.24 0.05 0.72 0.41 6.24 53.80 0.08 0.71 0.87 4.54 50.85 1.43 Papaval 3.04 0.13 14.73 43.54 Total 18.09 2.09 1.21 8.57 25.44 2.33 16.40 1.90 13.41 2.23 15.70 3.12 21.98

Dynasty Mineral Resource Estimate, July 2023

Notes: 1. Reported  $\geq$  0.5 g/t Au. 2. Some rounding errors may be present. 3. Tables are rounded as the final steps. Totals are not calculated after rounding. 4. M – million. Oz- ounce. g/t – grams per tonne.

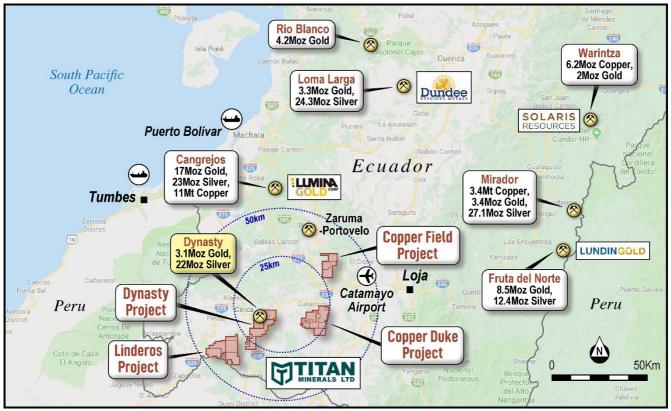


Figure 5. Titan Minerals southern Ecuador Projects, peer deposits and surrounding infrastructure



14 April 2024

## **Competent Person's Statements**

The information in this report that relates to Exploration Results is based on and fairly represents information compiled by Ms Melanie Leighton, who is an experienced geologist and a Member of The Australian Institute of Geoscientists. Ms Leighton is a full-time employee at Titan Minerals and has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which she is undertaking to qualify as a Competent Person as defined in the JORC 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources, and Ore Reserves'. Ms Leighton consents to their inclusion in the report of the matters based on this information in the form and context in which it appears.

With respect to estimates of Mineral Resources, announced on 6 July 2023, (MRE Announcement) the Company confirms that it is not aware of any new information or data that materially effects the information in the MRE Announcement and that all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed.

## **Forward-looking Statements**

This announcement may contain "forward-looking statements" and "forward-looking information", including statements and forecasts. Often, but not always, forward-looking information can be identified by the use of words such as "plans", "expects", "is expected", "is expecting", "budget", 'outlook", "scheduled", "estimates", "forecasts", "intends", "anticipates", or "believes", or variations (including negative variations) of such words and phrases, or state that certain actions, events or results "may", "could", "would", "might", or "will" be taken, occur or be achieved. Such information is based on assumptions and judgments of Titan's directors and management regarding future events and results.

The purpose of forward-looking information is to provide the audience with information about Titan's expectations and plans. Readers are cautioned that forward-looking information involves known and unknown risks, uncertainties and other factors which may cause the actual results, performance or achievements of Titan and/or its subsidiaries to be materially different from any future results, performance or achievements expressed or implied by the forward-looking information. Forward-looking information and statements are based on the reasonable assumptions, estimates, analysis and opinions of Titan directors and management made in light of their experience and their perception of trends, current conditions and expected developments, as well as other factors that Titan directors and management believe to be relevant and reasonable in the circumstances at the date such statements are made, but which may prove to be incorrect. Titan believes that the assumptions and expectations reflected in such forward-looking statements and information are reasonable.

Readers are cautioned that the foregoing list is not exhaustive of all factors and assumptions which may have been used. Titan does not undertake to update any forward-looking information or statements, except in accordance with applicable securities law.

Suite 1, 295 Rokeby Road Subiaco, WA 6008 ♦ +61 8 6555 2950
☑ info@titanminerals.com.au



14 April 2024

# Appendix A.

#### Table 1. Iguana Significant Diamond Drilling Results

Hole ID	Easting (m)	Northing (m)	RL	Length (m)	Dip (°)	Azimuth (°)		From (m)	To (m)	Length (m)	Au (g/t)	Ag (g/t)
IGDD24-035	623893	9545157	1395	120	-46	155		55.1	56.6	1.6	0.9	23.6
IGDD24-036	622510	9544750	1039	336	-73	132		49.9	55.2	5.4	2.3	5.7
								66.2	67.7	1.5	1.5	13.0
								205.6	216.7	11.2	1.2	11.1
							including	212.1	214.5	2.3	2.7	5.9
								331.4	331.9	0.5	1.9	3.5
IGDD24-037	623609	9544994	1245	151	-64	155		55.6	56.9	1.3	1.6	0.7
								66.3	74.0	7.7	0.5	2.6
IGDD24-040	622321	9544775	1017	337	-60	155		211.3	216.0	4.7	1.3	15.6
							including	211.3	212.7	1.4	3.4	42.9
IGDD24-041	623892	9544754	1362	121	-57	155		26.8	33.9	7.1	1.4	9.3
							including	26.8	29.4	2.6	3.5	21.5
								55.4	61.0	5.6	0.5	2.5
								92.9	96.5	3.7	2.5	9.9

NB. All locations are given in WGS84 Datum.

14 April 2025

## **APPENDIX B**

## Dynasty Project - 2012 JORC Table 1

## Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul> <li>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard</li> </ul>	• Diamond drilling method was used to obtain HTW and NTW core (71.4/56.23 mm diameter respectively) for density and chemical analyses. ½ or ¼ core was submitted for analysis.
	measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should	• Downhole survey and core orientation tools are used, Diamond core is halved with a diamond saw to ensure a representative sample.
	not be taken as limiting the broad meaning of sampling.	<ul> <li>Channel sampling is completed as representative cut samples across measured intervals cut with hammer or hammer and chisel techniques.</li> </ul>
	<ul> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> </ul>	• Samples were crushed to better than 70% passing a 2mm mesh and split to produce a 250g charge pulverised to 200 mesh to form a pulp sample.
	<ul> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> </ul>	<ul> <li>50g charges were split from each pulp for fire assay for Au with an atomic absorption (AA) finish and samples exceeding 10g/t Au (upper limit) have a separate 0g charge split and analysed by fire assay with a gravimetric finish. Samples returning &gt;10ppm Au from the AA finish technique are re-analysed by 30g fire assay for Au with</li> </ul>
	In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation	a gravimetric finish.
	drilling was used to obtain 1 m samples from which 3 kg	An additional charge is split from sample for four acid digests with ICP-MS reporting a 48-element suite.
	was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information.	<ul> <li>Within the 48 elements suite, overlimit analyses of a 5-element suite are performed with an ore grade technique (ICP-AES) if any one element for Ag, Pb, Zn, Cu, Mo exceeds detection limits in the ICP-MS method.</li> </ul>
Drilling techniques	<ul> <li>Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and</li> </ul>	• Drilling HTW diameter core with standard tube core barrels retrieved by wire line, reducing to NTW diameter core as required at depth.
(	details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit, or other type, whether core is oriented and if so, by what method, etc).	Drill core is oriented by Reflex ACT III and True Core tools.
Drill sample recovery	<ul> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> </ul>	• Diamond sample recovery is recorded on a run-by-run basis during drilling with measurements of recovered material ratioed against drill advance.
•	<ul> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> </ul>	• Diamond core is split in weathered material, and in competent unweathered/fresh rock is cut by a diamond saw to maintain a representative sample for the length of the sample interval.
	<ul> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	No correlation between sample recovery and grade is observed.
Logging	Whether core and chip samples have been geologically	• Diamond core samples are logged in detail, with descriptions and coded lithology for modelling purposes, with

MINERALS LTD

14 April 2025



JORC Code explanation	Commentary				
and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies	additional logging comprised of alteration, geotechnical, recovery, and structural logs including measurements based on core orientation marks generated from a Reflex ACTIII downhole survey tool.				
• Whether logging is qualitative or quantitative in nature.	Logging is predominantly qualitative in nature but including visual quantitative assessment of sulphide and quartz content included in text comments.				
<ul> <li>Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant</li> </ul>	• Core photographs are systematically acquired for whole core with sample intervals, orientation line prior and after the sampling in both wet and dry form.				
intersections logged.	• The total lengths of all reported drill holes have been logged geologically and data is uploaded to a self-validating database. ½ cut and ¼ cut core material is retained from diamond drilling for re-logging and audit purposes.				
• If core, whether cut or sawn and whether quarter, half or all cores taken.	• Diamond core is split or cut in weathered profile depending on hardness and competency of the core and cut with a diamond saw in fresh rock. Weathered, faulted, and fractured diamond core, prior to cutting, are docked, and				
• If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	<ul> <li>covered with packing tape to ensure a representative half sample is taken.</li> <li>A cutline on core is systematically applied for cutting and portion of core collected for analysis is systematic within</li> </ul>				
<ul> <li>For all sample types, the nature, quality, and appropriateness of the</li> </ul>	each hole. Diamond core sample recovery are reported as being completed in accordance with best practices the time of acquisition and considered to be appropriate and of good quality.				
<ul> <li>sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> </ul>	<ul> <li>Sample size studies have not been conducted but sample size used are typical of methods used for other A deposits of similar mineralisation styles.</li> </ul>				
<ul> <li>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</li> </ul>					
<ul> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>					
<ul> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> </ul>	<ul> <li>Assaying and Laboratory procedures reported are completed by certified independent labs and considered to appropriate and in accordance with best practices for the type and style of mineralisation being assayed for. O Fire Assay technique used is a total recovery technique for gold analysis. This technique is considered</li> </ul>				
	<ul> <li>appropriate method to evaluate total gold and silver content of the samples.</li> <li>No geophysical tools used in relation to the reported exploration results.</li> </ul>				
	In addition to the laboratory's own quality control ("QC") procedure(s), Titan Minerals Ltd- regularly inserts its ow Quality assurance and QC samples, with over 15% of samples in reported results corresponding to an inserte combination of certified reference materials (standards), certified blank material, field duplicate, lab duplicates (c both fine and coarse fraction material.				
<ul> <li>Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.</li> </ul>					
The verification of significant intersections by either independent or alternative company personnel.	• Reported intersections are logged by professional geologists in Australia and data validated by a senior geologist in Ecuador.				
<ul><li>The use of twinned holes.</li><li>Documentation of primary data, data entry procedures,</li></ul>	• Twin holes have not been used in the reported exploration results. The use of twinned holes is anticipated ir follow-up drilling.				
-	<ul> <li>and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> <li>If core, whether cut or sawn and whether quarter, half or all cores taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality, and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.</li> <li>The verification of significant intersections by either independent or alternative company personnel.</li> </ul>				

14 April 2025



Criteria	JORC Code explanation	Commentary
	<ul><li>data verification, data storage (physical and electronic) protocols.</li><li>Discuss any adjustment to assay data.</li></ul>	<ul> <li>Original laboratory data files in CSV and locked PDF formats are stored together with the merged data.</li> <li>All drilling, and surface data are stored in a self-validating MX Deposit geological database.</li> <li>No adjustment to data is made in the reported results</li> </ul>
Location of data points	<ul> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> </ul>	<ul> <li>Reported drill collars and channel samples are located with an RTK GPS survey unit with sub-centimetre reportir for the purpose of improved confidence in resource estimation work. A gyroscopic survey tool is used for downhole surveys.</li> </ul>
	<ul> <li>Specification of the grid system used</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul> <li>All surveyed data is collected and stored in WGS84 datum.</li> <li>Topographic control is ground survey quality and reconciled against Drone platform survey data with 1m pixer resolution. Assessed to be adequate for the purpose of resource estimation</li> </ul>
		Grid system used for all undertakings at the Dynasty Project is WGS84 Zone 17 South
Data spacing and distribution	<ul> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity</li> </ul>	<ul> <li>Data spacing for reported diamond drilling varies by prospect, targeting a nominal 80m lateral spacing and 80 vertical spacing for data acquisition to support Inferred Resources, and 40 lateral spacing x 40m vertical spacin to support Indicated Resources.</li> </ul>
	appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	<ul> <li>Reported Channel sampling is collected on 10m to 20m spacing depending on resolution of structural information deemed necessary by the geology team.</li> </ul>
	Whether sample compositing has been applied.	<ul> <li>Data spacing is anticipated to support mineral resource estimation for the indicated and inferred categories, wi data spacing and distribution for higher confidence resource estimation categories to be defined with furthe modelling and geostatistical analysis work.</li> </ul>
		No Sample compositing has been applied in reported exploration results.
Orientation of data in relation	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which	• The orientation of diamond drilling and trenching is perpendicular to mapped orientation of primary vein ar porphyry target observed in outcrop where possible.
to geological structure	<ul> <li>this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the arientation of low minor biand the drive type.</li> </ul>	Drilling is often completed on multiple azimuths as fan drilling with multiple holes collared from a single drill sit to minimise surface disturbance, which will result in some oblique intercepts to vein orientations.
	orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	<ul> <li>The true thickness of intercepts will be accounted for following structural analysis of oriented core and 30 modelling of veins. All results in relation to this report are drilled thickness and should not be interpreted as tru thickness at this time.</li> </ul>
		No bias is considered to have been introduced by the existing sampling orientation.
Sample security	• The measures taken to ensure sample security.	<ul> <li>Samples were collected by Titan Minerals geologists and held in a secure yard prior to shipment for laborator analysis. Samples are enclosed in polyweave sacks for delivery to the lab and weighed individually prior to shipment and upon arrival at the lab. Sample shipment is completed through a commercial transport compar- with closed stowage area for transport.</li> </ul>
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits or reviews of reported data completed outside of standard checks on inserted QAQC sampling.

14 April 2025



## Section 2 - Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> </ul>	<ul> <li>Titan Minerals Ltd, through its indirect wholly owned Ecuadorian subsidiaries, holds a portfolio of exploration properties in the Loja Province of Ecuador. Amongst these, Titan holds a 100% interest in the Pilo 9, Zar, Zar 1, Zar 3A and Cecilia 1 concessions forming the Dynasty Project and totalling an area of 13,909 hectares.</li> <li>Mineral concessions in Ecuador are subject to government royalty, the amount of which varies from 3% to 4% depending on scale of operations and for large scale operations (&gt;1,000tpd underground or &gt;3,000tpd open pit) is subject to negotiation of a mineral/mining agreement.</li> </ul>
	<ul> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to</li> </ul>	• Pilo 9, Zar and Zar 1 are subject to a 3% royalty payable to the Ecuador Government as part of the Small Scale Mine Licensing regime currently issued in favour of the Dynasty Gold Project but may be subject to change in the event economic studies after exploration indicate a need to apply for a change of regime.
	operate in the area.	• Concessions, Zar 3A and Cecilia 1 have not yet completed the environmental permitting process and require the grant of an Environmental Authorisation.
		<ul> <li>Mineral concessions require the holder to (i) pay an annual conservation fee per hectare, (ii) provide an annual environmental update report for the concessions including details of the environmental protection works program to be followed for the following year. These works do not need approval; and (iii) an annual report on the previous year's exploration and production activity. Mineral Concessions are renewable by the Ecuadorian Ministry of Oil, Mining and Energy in accordance with the Mining Law on such terms and conditions as defined in the Mining Law.</li> </ul>
Exploration dans	<ul> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul> <li>Dynasty Gold Project Exploration done by other parties set out in further detail in the Titan ASX release dated 19 May 2020, and summarised below:</li> </ul>
Exploration done by other parties		• 1977, the Spanish-Ecuadorian joint venture company, Enadimsa, claimed 1,350ha in the La Zanja (Cerro Verde) area for exploration - no results included in reporting.
		• During the 1970s the United Nations explored the "Curiplaya" area, 2 km east of the Dynasty Project. Copper and gold were detected in small quantities, data not included in reporting.
		• 1991–92, BHP Exploration Ltd. covered the general area with concessions, but the tenements eventually lapsed after minimal work.
		<ul> <li>2001 to 2003, a private prospecting company, Ecuasaxon, undertook investigations in the general area and discovered anomalous gold and silver in quartz-sulphide veins in what is now the concession area.</li> </ul>
		• 2003 until 2007 Dynasty Mining and Metals (later Core Gold) completed mapping, limited ground geophysical surveys and exploration sampling activity including 201 drill holes totalling 26,733.5m and 2,033 rock channel samples were taken from 1,161 surface trenches at Cerro Verde, Iguana Este, Trapichillo and Papayal in support of a maiden resource estimation.
		<ul> <li>2008 to 2009, the Ecuadorian Government introduced an exploration moratorium, where on April 18, 2008, Ecuador's Constitutional Assembly passed a Constituent Mandate resolution (the "Mining Mandate"), which provided, among other provisions, for the suspension of mineral exploration activities for 180 days, or until a new Mining Act was approved. The Mining Act was published in late January 2009. The mining regulations to supplement and provide rules which govern the Mining Act were issued in November 2009, after which time the Mining Act and Regulations (collectively, the "Mining Law") were enacted.</li> </ul>
		• 2017 to 2020 Core Gold Inc. (formerly Dynasty Mining and Metals) commenced small scale mining on a

14 April 2025



Criteria	JC	DRC Code explanation	C	ommentary
				small portion of the Dynasty Project. Operations exposed a number of veins of the Canadian NI 43-101 compliant resource estimate, and operations discovered several veins of varying orientations not previously identified in drill and trench exploration activities requiring further exploration activity to quantify.
Geology	•	Deposit type, geological setting, and style of mineralisation.	•	Regionally, the Dynasty gold project lies within the compressional Inter-Andean Graben that is bounded by regional scale faults. The graben is composed of thick Oligocene to Miocene aged volcano- sedimentary sequences that cover the Chaucha, Amotape and Guamote terrains. This structural zone hosts several significant epithermal, porphyry, mesothermal, S-type granitoid, VHMS and ultramafic/ophiolite precious metal and base metal mineral deposits.
			•	At the project scale, the intermediate volcanic hosted mineralised veins mainly occur along a faulted zone near and sub-parallel to the contact with the Cretaceous aged Tangula Batholith that extends north from Peru and is found outcropping in the east and south of the concessions.
			•	Porphyry intrusion style mineralisation hosting gold and copper mineralisation has also been mapped and intersected by drilling by at the Kaliman porphyry within the Dynasty Project area.
			•	Gold occurs in its native form along with sulphides, including pyrite, sphalerite, galena, arsenopyrite, marcasite, chalcopyrite and bornite.
Drill hole Information	•	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:	•	Tabulation of requisite information for all reported drilling results with significant intercepts validated by Titan geologists and referenced in this report are included in Appendix A of this report.
			•	Total number of drill holes and trench sites included in this report and located in graphics included in the report.
		<ul> <li>easting and northing of the drill hole collar</li> </ul>		
		<ul> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> </ul>		
		$\circ$ dip and azimuth of the hole		
		<ul> <li>down hole length and interception depth</li> </ul>		
		• hole length.		
	•	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.		
Data aggregation methods	•	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of	•	No high-grade assay cut was applied to reported gold results. In the case of silver, the initial upper detection limit of the four-acid digest used is 100ppm, and an overlimit analysis method with an upper detection limit of 1,500ppm is used.
		high grades) and cut-off grades are usually Material and should be stated		Lower cut-off for reported significant intercepts is nominally 0.5 g/t Au with up to 4m of internal dilution (results with <0.1g/t Au or un-sampled intervals where null values are taken as a zero-gold grade in

titanminerals.com.au ASX: TTM

14 April 2025



Criteria	JORC Code explanation	Commentary
	<ul> <li>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul> <li>calculating significant intercepts) are allowed within a reported intercept.</li> <li>No metal equivalent reporting is applicable to this announcement</li> </ul>
Relationship between mineralisation widths and intercept lengths	<ul> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known').</li> </ul>	<ul> <li>Reported intersections are measured sample lengths. Reported trench and channel intersections are of unknown true width, further drilling and modelling of results is required to confirm the projected dip(s) of mineralised zones.</li> <li>Reported intercepts are drilled thickness and should not be interpreted as true thickness unless otherwise indicated.</li> </ul>
Diagrams	<ul> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul> <li>Included in body of report as deemed appropriate by the competent person</li> </ul>
Balanced reporting	• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.	<ul> <li>All material exploration results for surface geochemistry are included in the appendices of this report, and location of all results are included in figures provided in their entirety.</li> <li>All results above 0.2g/t Au are included when reporting high grade vein hosted gold mineralisation. No upper cut-off has been applied.</li> </ul>
Other substantive exploration data	<ul> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics;</li> </ul>	<ul> <li>No other available datasets are considered relevant to reported exploration results. Historical exploration results include orientation studies for ground magnetics, IP Geophysics, and soil sampling grids, however each of these surveys are limited in scale relative to the project and are not considered material to assess potential of the larger project area.</li> <li>Bulk density tests have been completed on areas related to the reported exploration results.</li> </ul>

titanminerals.com.au ASX: TTM

14 April 2025



Criteria	JORC Code explanation	Commentary			
	potential deleterious or contaminating substances.				
Further work	<ul> <li>The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> </ul>	<ul> <li>Additional mapping, trenching and drilling is planned to better define structural controls on mineralisation and assess open ended mineralisation on multiple mineralised corridors within the project area. Further mapping and sampling are to be conducted along strike of reported work to refine and prioritise targets for drill testing.</li> </ul>			
	<ul> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul> <li>Included in body of report as deemed appropriate by the competent person.</li> </ul>			

titanminerals.com.au ASX: TTM